

ELECTRIC LIFT TRUCK COUNTER BALANCED TRUCKS

FB5

- A complete forklift in a small package
- Weighing only 990kg, it can even ride the elevator
- Long wheelbase for exceptional stability
- Sharper turns, thanks to the dual drive motors on the front wheels



Ideal for Material Handling in Confined Workspaces



Form-fitting seat for exceptional operator comfort



Neutral safety feature helps prevent operation mishaps





A high-capacity battery offering ample power and a long service life combined with easy maintenance

Standard Specifications

Model		FB5		
Performance	Capacity	kg	500	
	Load Center	mm	400	
	Lifting Height	mm	2500	
	Free Lift	mm	0	
	Lift Speed	Laden	mm/s	200
		Unladen	mm/s	300
	Travel Speed	Laden	km/h	8
		Unladen	km/h	9.5
	Min. Turning Radius	mm	1200	
	Min. 90° Turning Aisle*	mm	3000	
Gradeability (Laden)	%	10		
Dimensions	Overall Length	mm	2115	
	Overall Width	mm	850	
	Overall Height	Overheadguard	mm	1865
		Mast Lowered	mm	1740
		Mast Extended	mm	3300
	Fork Length	mm	620	
	Wheelbase	mm	1000	
	Road Clearance	mm	90(Mast)	
	Front Overhang	mm	295	
	Rear Overhang	mm	200	
	Tread	Front	mm	740
		Rear	mm	250
Service Weight (W/STD Battery)	kg	990		
Tyres	Front		4.00-8-6PR	
	Rear		3.50-5-6PR (Double)	
Control System	Travel		Chopper	
	Hydraulic		Contactactor	
Motors	Traction	kW	0.4x2	
	Hydraulic	kW	1.6	
	Power Steering	kW	-	
Battery	Voltage	V	24	
	Capacity	Standard	Ah/	140
		Optional	5HR	200
	Battery Weight (Min./Max.)	kg	120/150	
Charger	Type		Automatic Stationary Charger	
	Input	Φ/V	1/100	
	Capacity	kVA	1.6	

*1100x1100 mm pallet, no clearance included

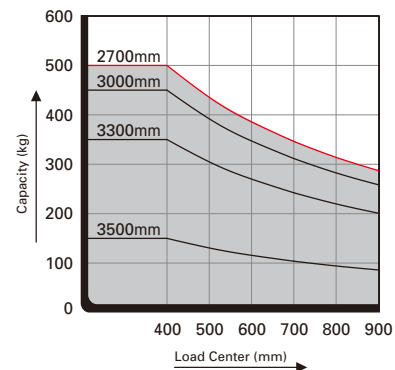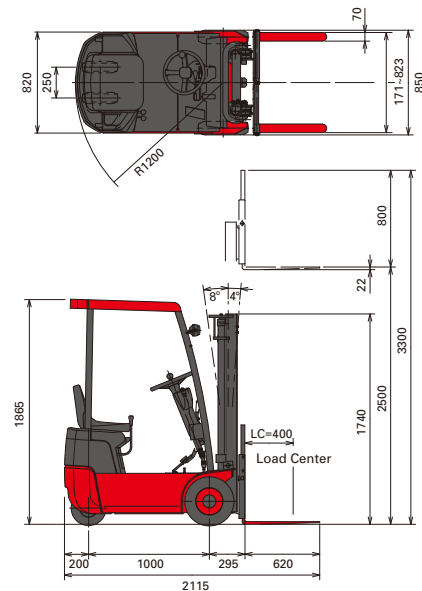

All specifications have been determined according to manufacturer's terms and conditions. Specifications are subject to change without notice in the interests of product improvement.